

# AN-1000X Speaker Monitor

Portable Speaker Monitor Specifications

## Advancing Technology

The AN-1000X is the most versatile powered monitor on the market. You can add it to an A/V rack setup, use it as a studio monitor, install it in a trade show booth, or place it in the Captain's quarters on a US Navy warship to monitor activities in the intelligence room. Just imagine . . .



## 6-YEAR WARRANTY!

REACH CROWDS OF 400+

103 DB OF CLEAR SOUND

BASS & TREBLE CONTROLS

50 WATT SOUND SYSTEM W/  
RESPONSE FROM 65HZ - 20KHZ

RCA & 1/4" LINE INPUTS

MIC/LINE CONFIGURABLE XLR INPUT

MAGNETICALLY SHIELDED SPEAKER

220 VOLT CE-COMPLIANT MODEL

DURABLE INJECTION-MOLDED CASE

2-WAY SPEAKER SYSTEM COMBINES  
4.5" WOOFER & DOME TWEETER

SPEAKER OUTPUT DRIVES  
COMPANION SPEAKER

## MADE IN THE USA!


## AN-1000X MODELS

**AN-1000X** Powered monitor speaker

**AN-1001X/70** Internal 70 volt transformer

### AN-1000X DAISY-CHAIN

DAISY-CHAIN READY • CONNECT MULTIPLE SYSTEMS



SIMPLE LINE-OUT TO LINE-IN CONNECTION EXPANDS COVERAGE.

## AN-1000X ACCESSORIES

**AN-1001X** Unpowered companion speaker

**MIC-90** Professional dynamic, cardioid pattern handheld microphone

**SC-50** 50' Speaker cable

**CC-100** Speaker/accessory bag

**CC-100XL** Speaker/accessory bag – large

**HC-1550** Custom traveling hard case

**CC-550** Speaker stand/accessory bag

**SS-250** Speaker stand


**MSB-201** Mic stand w/ boom

**SB-1** Stand mount

**SB-3** Ceiling mount bracket\*

**SB-360** 360° swivel wall bracket\*

\* Available w/ black or white finish

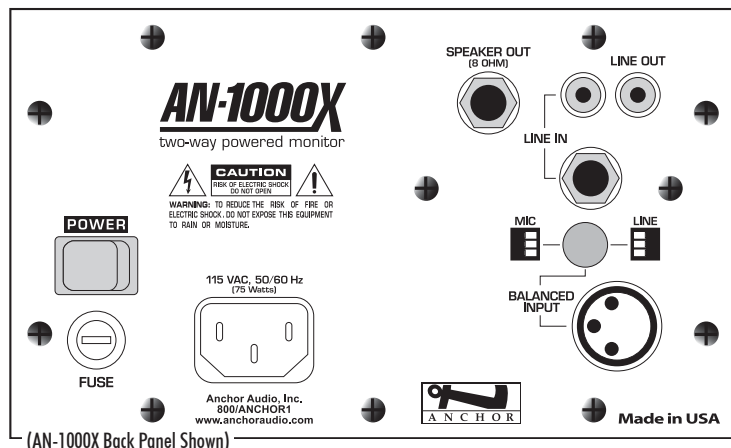

(AN-1000X Back Panel Shown)

## AN-1000X TECHNICAL SPECIFICATIONS

Rated Power Output	50 watts continuous @ 4 ohm
Max SPL @ Rated Power	103 dB @ 1 meter
Frequency Response	65 Hz – 20 kHz ± 3 dB
AC Power Reqs.	110 – 125Vac, 50/60 Hz, 90W Max 208 – 240Vac, 50/60 Hz, 90W Max
Dimensions (HWD)	5.25 x 8.4 x 9" / 13 x 21 x 23 cm
Weight	9.5 pounds / 4.3 Kg

<b>Inputs</b>	
Balanced	mic / line configurable, female XLR, switchable phantom power
Line	Hi-Z, unbalanced, 1/4"-phone & RCA
<b>Outputs</b>	
Line	Lo-Z, RCA, buffer isolated line-level
Speaker	8 ohm, unswitched, 1/4"-phone

(FEATURES & SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE)



**Anchor Audio, Inc.**

Portable Sound Systems • Torrance, California

**888/444-6077**

www.anchoraudio.com